

R-PSX


PCR BASED HIGH BARRIER ALOX FILM

R-PSX is a high barrier transparent BOPET film. The film has a Protective Printable layer atop a High Barrier vacuum deposit on one side with the other side Primer Coated or Untreated. This Data Sheet applies to all PCR content levels (20, 30, 50, 90, and 100%).

KEY FEATURES:

- Excellent moisture & oxygen barrier properties
- Higher yield over PVDC coated films
- PVDC / EVOH (PE) coated film replacement
- Environmentally friendly
- High clarity and product visibility
- Post Consumer Recycle content for a low carbon footprint (all % PCR)

FILM STRUCTURE

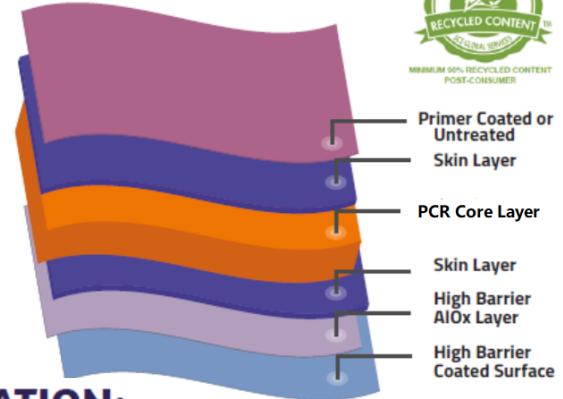

APPLICATION:

- The film is suitable for high barrier applications like dried meat snacks, confectionaries, microwavable foods, etc
- Eye catching packaging
- Handle film with care during printing and lamination processes to retain high barrier properties
- Suitable for hot fill, sterilization, pasteurization, and retort applications
- Industrial packaging

Key note:- Selection of specific ink & adhesive For Retort Application

PROPERTIES	TEST METHOD	UNIT	TYPICAL VALUES	
THICKNESS	Internal	Micron		12.5
		(Gauge)		50
YIELD	Internal	m ² / kg		57.14
		in ² /lb		40257
SURFACE TENSION (min) (Primer Coated or Untreated Side) (High Barrier Coated Surface)	ASTM D-2578	dyne/cm		42
				56
COF (max) (One side to the other side)	ASTM D-1894	-		0.50
HAZE (max)	ASTM D-1003	%		3.0
TENSILE STRENGTH AT BREAK (min)	ASTM D-882	kg/cm ²	MD	1900
			TD	2000
		(Psi)	MD	27000
			TD	28500
ELONGATION AT BREAK (min)	ASTM D-882	%	MD	105
			TD	85
LINEAR SHRINKAGE (max) (30 Minute at 150°C)	ASTM D-1204	%	MD	3.0
			TD	1.0
MVTR (38°C & 90% RH) (typical)	ASTM F-1249	gm/m ² /day		0.8
		(gm/100 in ² /day)		0.05
OTR (23°C & 0% RH) (typical)	ASTM D-3985	cc/m ² /day		0.7
		(cc/100 in ² /day)		0.045

STORAGE & HANDLING

FLEX ALOXPROTECT™ needs to be stored in a warehouse below 35°C (95°F) and should not be exposed to direct sunlight, bright light sources, or high humidity. If the material is stored in the recommended conditions this material is suitable for use within 180 days from the date of shipment.

FOOD CONTACT

FLEX ALOXPROTECT™ complies with EU and FDA regulations on plastic materials used for food grade applications. Specific documents and SDS are available on request.

DISCLAIMER

It is the responsibility of our customer to determine that their use of our products is safe, lawful, and technically suitable in their intended applications. The technical data sheets are provided for discussion purposes only. The customer may not rely on the data provided for any manufacturing purpose. The values provided in the technical data sheet represent typical values based on the best of our knowledge as of the date when the data was compiled. The data is offered solely to provide possible suggestions for your own experimentation and not as a guarantee for the material supplied. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability/compatibility in all respects. Flex provides no warranty and accepts no liability for any loss or fitness of the product for any specific purpose based on the information contained in the technical data sheets. Flex reserves the right to change the technical data sheet at any time without prior notice.

Ref. No: QAD UFLI 5/24 - FAL/Sep-24/P

** TDS issued on 19-09-2024. All previous version of this grade are invalid.

FlexFilms

Manufacturing Facilities at
India | UAE | Poland | Egypt | Mexico |
USA | Hungary | Russia | Nigeria
enquiry@flexfilm.com
www.flexfilm.com